


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	4/2/2015	DPD	JAG
2	16-0262	CH'D FINISH WAS CAD PLATE YELLOW IS ZINC PLATE, CH'D SPEC WAS QQ-P-416F, TYPE II, CLASS II IS ASTM B633 TYPE I SC 2, CH'D MATERIAL WAS 1018/1020 IS 1018/1020 CR, CH'D THREAD WAS M10x1.0 IS M10x1.0 - 6g.	12/5/2016	SM	JAG

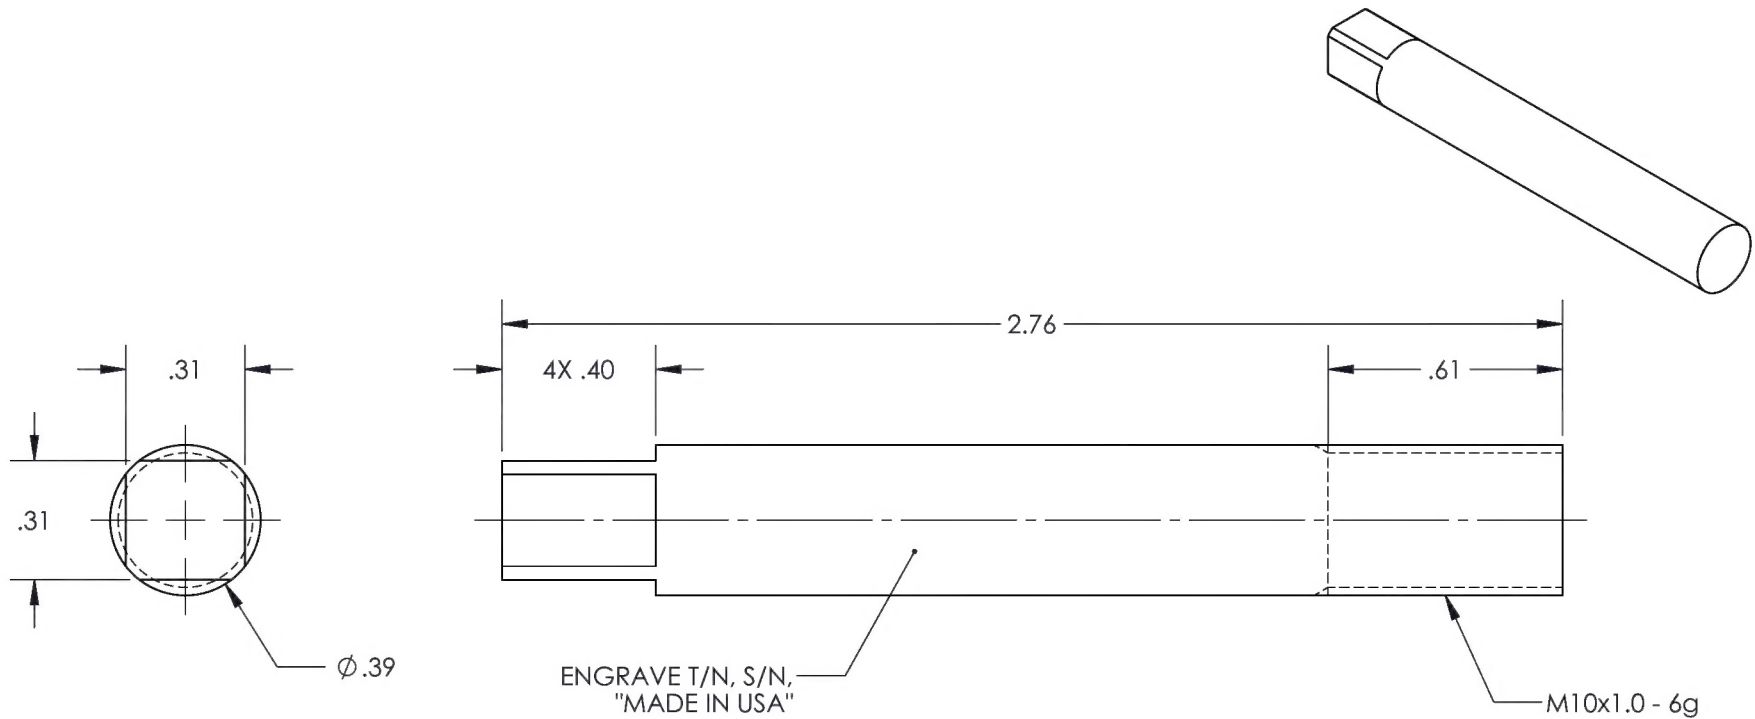

- NOTES:
1. REF. AGUSTA T/N: 3G6305G11151.
 2. PART OF KIT: RBW6305G02831-3G.

DART AEROSPACE	
TITLE PIN, M/R SERVOACTUATOR FITTING INSTL	
DWG NO. RBW6305G11151-3G	REV 2
MAT'L 1018/1020 CR	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH ZINC PLATE	.XXX ± .005 FRACTIONS ± 1/8
SPEC ASTM B633 TYPE I SC 2	.XX ± .01 ANGLES ± 5°
DRAWN BY: DUERFELDT	.X ± .1 SURFACES = 125°
CHECKED: CLOUGH	1. BREAK ALL SHARP EDGES
OPPS APPR: ANDERSON	.015 x 45° OR .015R
QA APPR: LINDSAY	2. DIMENSIONAL LIMITS APPLY
APPROVED: GILBERT	AFTER PLATING
SCALE 2:1	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
DATE 3/10/2015	USED ON MODEL
	AW139
	SHEET 1 OF 1

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
				1	PIN	1018/1020 CR	